


Low Frequency Absorption (FWLFA)

FabricWall's 2" FWLFA panel is an excellent at low frequency sound-absorption. The FWLFA core is designed for areas that require sound absorption in the low-to-middle frequencies while preserving higher frequency sound. Choose the FWLFA core for places such as band rooms and performance halls.



Core Section

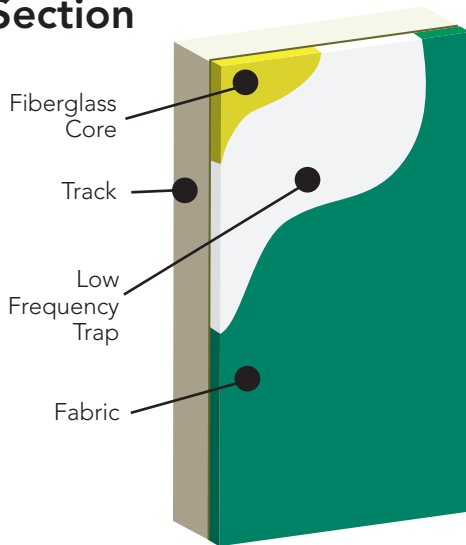

Core

Facing: Low Frequency Trap

Backing: 6-7 pcf recycled fiberglass, 2" thick

Sizes

Custom sizes and shapes up to 4'x10'

Flammability

All components have a Class "A" rating per ASTM E84

Sound Absorption

Hz	125	250	500	1000	2000	4000	NRC
FWLFA 2	.71	.27	.86	.58	.45	.36	.55

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.